

SPECIFICATIONS

- Portable rectangular recorder 277 x 277mm with handle and feet
- Case St. Steel 316, weatherproof, corrosion resistant
- Recording with disposable felt pen on circular recorder charts diameter 223mm, writing width 80mm
- Mechanical spring wound clock, revolution time 24hrs (clockwise)
- Viewing window laminated safety glass
- Accuracy Class 1.0 (+/- 1% of full scale)
- Connection back, 1/4" NPT female or 1/4" HP female

Pressure Range:	Minimum Temperature Span: 60°C
0 - 10,000 psi	Minimum Temperature: -170°C
0 - 15,000 psi	Maximum Temperature: +600°C
0 - 20,000 psi	
0 - 30,000 psi	

OPTIONS

- Wall or Panel Mounting
- Mechanical spring wound clock, single revolution time 1hr, 4hrs, 8hrs, 12hrs or 7 days (clockwise, optional: anti-clockwise)
- Switchable clockworks 1hr/15min, 1hr/4hrs, 2hrs/8hrs, 24hrs/7 days (clockwise)
- Multiprogrammable battery-operated chart drive (anti-clockwise)
- Dual pen execution
- Other ranges and process connections are available upon request

ORDERING INFORMATION:


- Model Number
- Mounting: wall mount / panel mount / portable
- Range
- Clockwork revolution time
- Options, if any

NOTE:

- All our recorders are supplied with 50 recorder charts and 1 spare felt pen
- Calibration certificate is optional at additional cost



8" Portable Pressure Chart Recorder
Maximator MX 4888SST

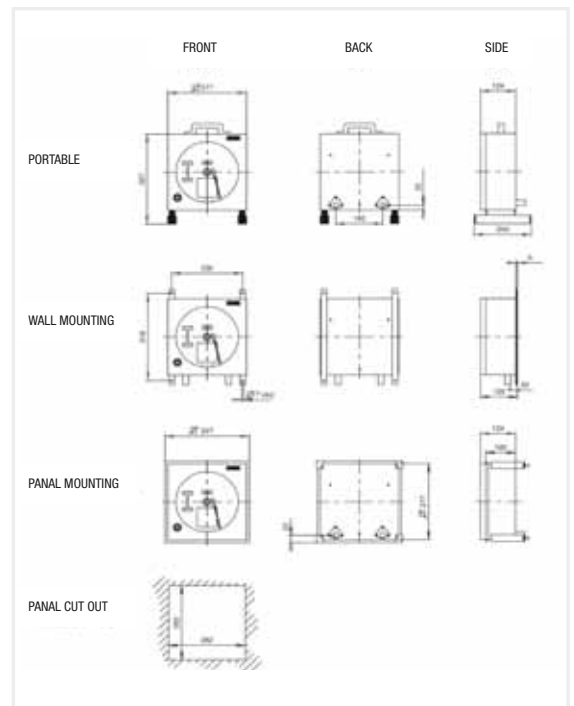

Dimensional Data MX 4888SST (mm)

All technical and dimensional information are subject to changes. All general terms and conditions of sale including limitations of our liability are applicable to all products and service sold.